


# RPM Industries Aluminum Standard Shapes Catalogue

## Angles, Equal Legs-Structural

Symbol Explanations:

S = Solids

H= Hollows

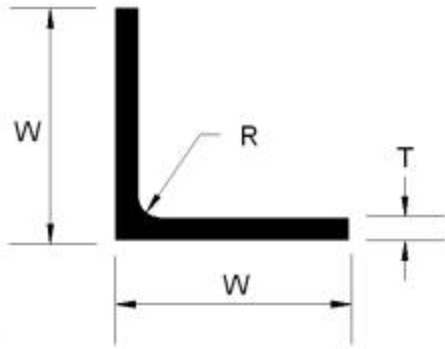

| DIE#    | DimW  | DimT  | DimR  | WT.<br>(LBS/FT) | S | H |
|---------|-------|-------|-------|-----------------|---|---|
| RE2228  | 1.000 | 0.125 | 0.125 | 0.281           | X |   |
| RE3302  | 1.000 | 0.187 | 0.187 | 0.409           | X |   |
| RE3808  | 1.000 | 0.250 | 0.250 | 0.532           | X |   |
| RE2321  | 1.250 | 0.187 | 0.187 | 0.519           | X |   |
| RE2154  | 1.500 | 0.125 | 0.125 | 0.428           | X |   |
| RE2108  | 1.500 | 0.187 | 0.187 | 0.630           | X |   |
| RE3819  | 2.000 | 0.125 | 0.125 | 0.576           | X |   |
| RE2159  | 2.000 | 0.187 | 0.187 | 0.851           | X |   |
| RE2158  | 2.000 | 0.250 | 0.250 | 1.122           | X |   |
| RE2237  | 2.000 | 0.375 | 0.375 | 1.640           | X |   |
| RE2236  | 3.000 | 0.187 | 0.187 | 1.292           | X |   |
| RER2227 | 3.000 | 0.250 | 0.250 | 1.712           | X |   |
| RE4667  | 3.000 | 0.375 | 0.375 | 2.525           | X |   |
| RE4669  | 4.000 | 0.375 | 0.375 | 3.410           | X |   |
| RE22741 | 6.000 | 0.375 | 0.375 | 5.179           | X |   |
| RE22758 | 6.000 | 0.500 | 0.500 | 6.848           | X |   |