


# RPM Industries Aluminum Standard Shapes Catalogue

## Channels-American Standard

Symbol Explanations:

S = Solids

H= Hollows

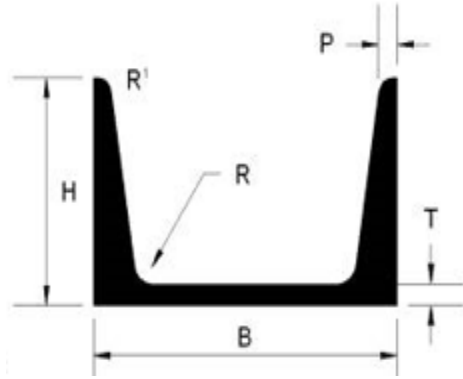

DIE#	DimB	DimH	DimP	DimT	DimR	DimR1	WT. (LBS/FT)	S	H
RE10509	3.000	1.410	0.170	0.170	0.270	0.100	1.423	X	
RE10510	3.000	1.498	0.170	0.258	0.270	0.100	1.735	X	
RE10511	3.000	1.596	0.170	0.356	0.270	0.100	2.082	X	
RC245	3.000	2.000	0.250	0.250	0.250	0.015	2.240	X	
RE10512	4.000	1.580	0.180	0.180	0.280	0.110	1.852	X	
RE10513	4.000	1.647	0.180	0.247	0.280	0.110	2.169	X	
RE10514	4.000	1.720	0.180	0.320	0.280	0.110	2.513	X	
RC244	4.000	2.500	0.313	0.318	0.375	0.125	3.320	X	
RE10515	5.000	1.750	0.190	0.190	0.290	0.110	2.324	X	
RE41	5.000	1.885	0.190	0.325	0.290	0.110	3.120	X	
RE26336	5.000	2.032	0.190	0.472	0.290	0.110	3.988	X	
RE24114	6.000	1.250	0.186	0.188	0.250	0.125	2.203	X	
RE43	6.000	1.920	0.200	0.200	0.300	0.120	2.836	X	
RE10516	6.000	1.945	0.200	0.225	0.300	0.120	3.013	X	
RE10517	6.000	2.034	0.200	0.314	0.300	0.120	3.643	X	
RE45	6.000	2.157	0.200	0.437	0.300	0.120	4.514	X	
RE10518	7.000	2.110	0.210	0.230	0.310	0.130	3.554	X	
RE26337	7.000	2.194	0.210	0.314	0.310	0.130	4.248	X	
RE47	8.000	2.290	0.220	0.250	0.320	0.130	4.267	X	
RE10519	10.000	2.600	0.240	0.240	0.340	0.140	5.297	X	
RE25630	12.000	2.960	0.280	0.300	0.380	0.170	7.215	X	