


RPM Industries Aluminum Standard Shapes Catalogue

Channels-Structural

Symbol Explanations:

S = Solids

H= Hollows

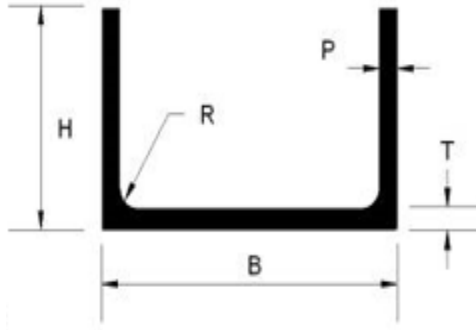

DIE#	DimB	DimH	DimP	DimT	DimR	WT. (LBS/FT)	S	H
RE24927	2.000	1.250	0.250	0.188	0.130	1.078	X	
RE51	3.000	1.500	0.200	0.130	0.250	1.138	X	
RE24928	3.000	1.750	0.260	0.170	0.250	1.603	X	
RE22095	3.000	2.000	0.250	0.250	0.250	1.949	X	
RE12537	4.000	1.812	0.250	0.188	0.312	1.894	X	
RE25972	4.000	2.000	0.230	0.150	0.250	1.743	X	
RE4862	4.000	2.000	0.250	0.250	0.250	2.244	X	
RE16347	4.000	2.250	0.290	0.190	0.250	2.338	X	
RE52	5.000	2.250	0.260	0.150	0.300	2.219	X	
RE53	5.000	2.750	0.320	0.190	0.300	3.100	X	
RE24926	6.000	1.250	0.200	0.200	0.190	1.930	X	
RE26879	6.000	2.500	0.290	0.170	0.300	2.834	X	
RE4968	6.000	2.500	0.312	0.250	0.437	3.523	X	
RE199	6.000	3.250	0.350	0.210	0.300	4.034	X	
RE26333	7.000	2.750	0.290	0.170	0.300	3.215	X	
RE26739	8.000	2.290	0.250	0.313	0.437	4.218	X	