


RPM Industries Aluminum Standard Shapes Catalogue

F Section Channels

Symbol Explanations:

S = Solids

H= Hollows

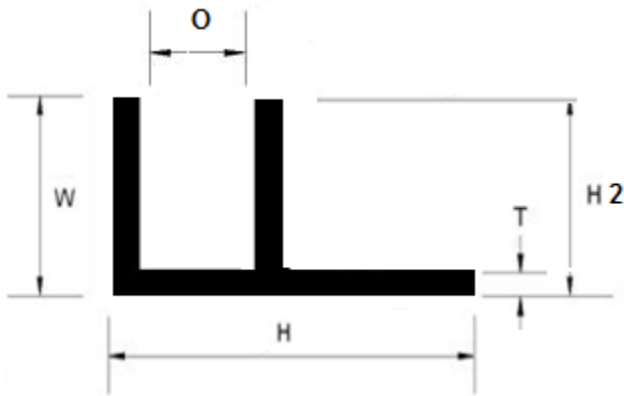

DIE#	DimH	DimW	DimH2	DimO	DimT	WT. (LBS/FT)	S	H
RCWS-278	0.625	0.562	0.562	0.187	0.062	0.121	X	
RC2383	0.625	0.625	0.625	0.187	0.062	0.130	X	
RC938	0.734	0.500	0.437	0.140	0.062	0.115	X	
RC276	1.000	1.000	1.000	0.250	0.062	0.314	X	
RC680	1.000	1.195	1.062	0.250	0.062	0.233	X	
RC807	1.062	1.500	1.500	0.312	**	0.332	X	
RCWS-1153	1.070	1.000	1.000	0.250	**	0.268	X	
RCWS-1082	1.116	1.000	1.000	0.250	**	0.364	X	
RC956	1.125	1.125	1.125	0.250	**	0.271	X	
RC1094	1.187	1.000	1.000	0.250	0.093	0.335	X	
RC728	1.187	2.000	2.000	0.312	**	0.415	X	
RC969	1.250	1.500	1.500	0.312	0.110	0.532	X	
RC7625	1.374	1.062	1.062	0.250	0.062	0.251	X	
RC2864	1.375	0.750	0.703	0.250	0.078	0.251	X	
RC7626	1.499	1.625	1.625	0.313	0.093	0.559	X	
RC7225	1.500	0.187	0.187	0.500	**	0.206	X	
RC1094	1.500	1.195	1.062	0.250	0.062	0.270	X	
RC793	1.500	1.250	1.250	0.250	0.093	0.426	X	
RC492	1.562	1.500	1.500	0.312	0.110	0.573	X	
RC2336	1.563	1.250	1.250	0.344	**	0.518	X	
RC6664	1.750	0.875	0.875	0.500	0.060	0.244	X	
RC6850	1.750	1.062	1.062	1.125	0.062	0.277	X	
RC2865	1.812	1.375	1.250	0.312	0.125	0.628	X	

RC6504	1.860	0.380	0.380	0.260	0.060	0.179	X
RC1284	1.875	1.500	1.500	0.312	0.125	0.694	X
RC7554	2.375	2.000	2.000	1.188	0.075	0.560	X