


# RPM Industries Aluminum Standard Shapes Catalogue

## I-Beam and H-Beam-American Standard

Symbol Explanations:

S = Solids

H= Hollows

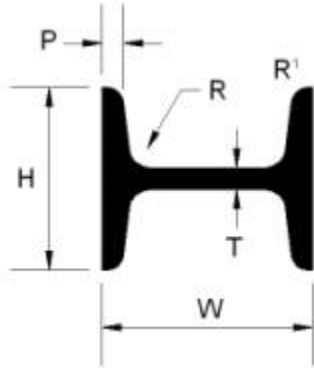

DIE#	DimH	DimW	DimT	DimP	DimR	DimR1	WT. (LBS/FT)	S	H
RE13562	2.510	3.000	0.349	0.170	0.270	0.090	2.606	X	
RE55	2.660	4.000	0.190	0.190	0.290	0.110	2.654	X	
RE56	3.000	5.000	0.210	0.210	0.310	0.210	3.442	X	
RE16375	3.449	6.000	0.343	0.230	0.330	0.140	5.106	X	
RE63	4.000	4.000	0.313	0.290	0.313	0.145	4.774	X	
RE64	5.938	6.000	0.250	0.360	0.313	0.180	7.882	X	
RE26340	6.125	6.000	0.438	0.347	0.313	0.180	9.184	X	