


# RPM Industries Aluminum Standard Shapes Catalogue

## I-Beam and H-Beam-Aluminum Association

Symbol Explanations:

S = Solids

H= Hollows

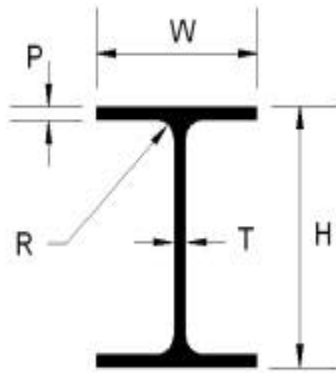

DIE#	DimW	DimH	DimP	DimT	DimR	WT. (LBS/FT)	S	H
RE26468	2.250	4.000	0.215	0.135	0.105	1.720	X	
RE26738	4.000	4.000	0.250	0.375	0.437	3.846	X	
RE5258	4.000	4.000	0.312	0.250	0.437	4.135	X	
RE57	4.000	6.000	0.279	0.230	0.250	4.174	X	
RE4403	5.000	5.000	0.375	0.312	0.562	6.309	X	
RE21927	5.000	8.000	0.410	0.250	0.300	7.047	X	
RE26325	5.250	8.000	0.308	0.230	0.320	5.923	X	
RE58	6.000	6.000	0.269	0.240	0.250	5.419	X	